CSE31PAR Assignment 1998

Objectives

This assignment provides experience in simulating TTPN models of systems. It is designed to reinforce the following areas of the curriculum.

- TTPN modelling.
- Simulation techniques for complex TTPN's.
- Investigation of systems using simulation.

Tasks

- To implement a model of a TTPN which is detailed later in this handout.
- To extend the simulation program to collect statistics when the TTPN is simulated for many time steps. This will allow you to answer some questions related to the system that is being modelled.

Due Date:	**28/4/98 at 9am.**

Departmental Policies on Assignments and Plagiarism

Please see the Departmental handbook for full details on the procedures related to the administration and return of assignments.

Plagiarism is the process of claiming that work done by others has been done by you. Please note that the Department has a policy on plagiarism in assignments and you should consult the relevant Departmental handout for full details.

What to Submit

Submission will be electronically managed via the commands **submit** and **verify**. To submit your assignment create a directory called "PAR". Copy into that directory the following files.

- The simulation files kernel.src, and timing.src.
- A short text file giving your results, using those results to answer the questions posed above, and justifying your model in terms of correctness.

Execute the command "submit PAR<CR>" to send the contents of the directory to the submission site. You can check that the submission has been successful by issuing a "verify" command. If you make an incorrect submission resubmit using the "submit" command again. This will overwrite your previous submission.

Marking Scheme

Modelling (7)		
	Transition Inputs	2
	Transition Outputs	2
	Inital Marking	1
	Timing Functions	2
Statistics Code (4)		
Results and Analysis(3)		
Total Marks(15)		

Background

Transition timed petri-nets (TTPN's) are a focus of the modelling section of the CSE31PAR course. They allow us to model systems that include the notion of delay between state transitions. We have formulated TTPN models for a range of situations and we have discussed the idea of simulating TTPN models in order to answer efficiency and safety questions for complex models. This technique can be used in conjunction with reachability analysis to answer a range of questions.

To carry out the first part of the assignment you will need to understand how the data structures in the file "timing.src" are set up to represent a TTPN. The file contains code to model the following TTPN as an example to help you understand what the data structures and timing delay functions do. This augments the information given to you in lectures and pracs.

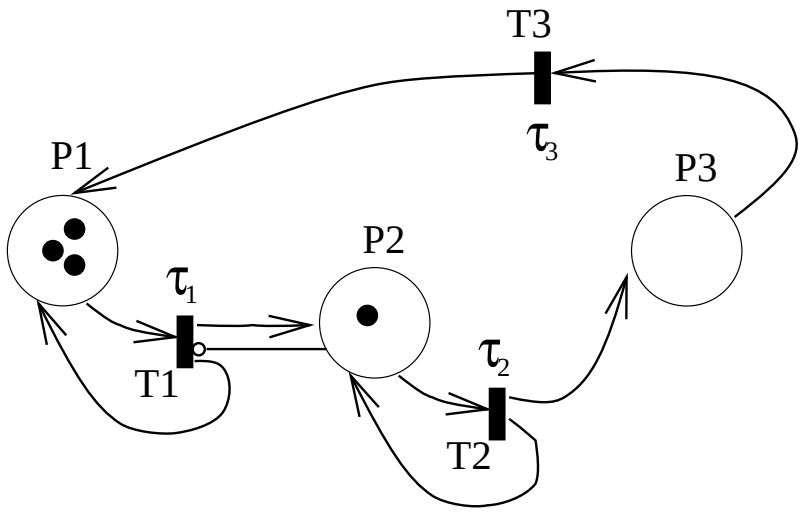

The firing delay for transitions is regulated by three delay functions.

$$\tau_1 = f(x),\ where\ f(x) = \begin{cases} 3 & \text{if } x = 0 \\ ((f(x-1)-7)\ mod\ 15)+1 & \text{otherwise} \end{cases}$$

$$\tau_2 = 1$$

$$\tau_3 = g(x),\ where\ g(x) = \begin{cases} 2 & \text{if } x = 0 \\ ((g(x-1)^2)\ mod\ 3)+1 & \text{otherwise} \end{cases}$$

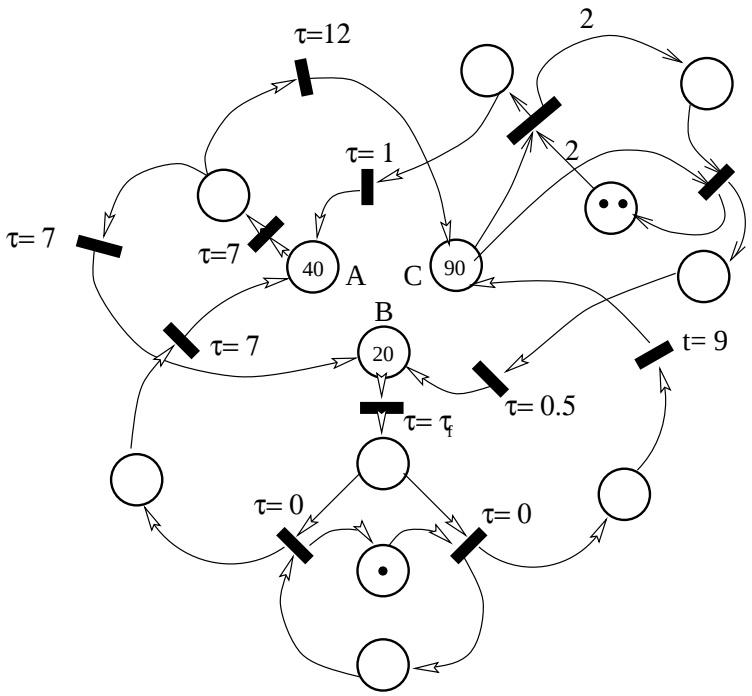

Figure 1: A Transition Timed Petri-Net of the Truck Despatch System

Problem Description

A commercial transportation company maintains a fleet of trucks with which to transport items orderd by its customers between three major distribution centres (we will call the centres A, B and C).

Trucks leave A on a regular schedule 7 time units apart, but their destination is either B or C depending on whether a truck is already en-route to C or B. The trip from A to B takes 7 time units and from A to C takes 12 time units.

Trucks leaving B for A and C leave intermittently, and their frequency of departure is described by a function $\mathcal{T}_f$. These trucks are allocated to alternating destinations by a dispatcher. The trip from B to A takes 7 time units and from B to C 9 time units.

Trucks leave C for other destinations every 2 time units and proceed to destinations A and B in a ratio 1:2. That is, two trucks depart for B for every truck that departs for A. The trip from C to A takes 12 time units, and the trip from C to B takes 9 time units.

Assume the following initial configuration of trucks.

$$A = 40, B = 20, C = 90$$

A TTPN model of this system is shown in figure 1.

Details of the Tasks to be Attempted

Using the diagrammatic representation of the TTPN for this system, implement it within the simulation by altering the data structures and functions defined in the file "timing.src".

To collect statistics about the system you will need to extend the data structures in the file "kernel.src" to include new data structures to keep track of the contents of the

marking MU over the duration of the simulation. These structures should be updated in the function "Stats", which currently prints the contents of MU and the global virtual time (GVT) to the screen. Note that the current version of the Stats function also checks that a safety property of the sample net is not violated. You will need to remove this check when simulating your TTPN.

Using your model collect appropriate statistics with which to answer the following questions. You will need to decide when to terminate a simulation as the net may execute forever.

1. Does the system result in a shortage of trucks in any of the three locations?
2. What are the maximum and minimum number of trucks at each depot during the simulation.
3. What are the average number of trucks at each depot over the period of the simulation.