KT-2

P3 / 2002

Program Analysis and Optimization

Analysis and Optimizations

- Program Analysis
  - Discover properties of program
- Optimizations
  - Use analysis results to transform program
  - Goal: improve some aspect of program
    - number of executed instructions, number of cycles
    - cache hit rate
    - memory space (code or data)
    - power consumption

Control Flow Graph

```
into add(n, k) {
    s = 0; a = 4; i = 0;
    if (k == 0) b = 1;
    else b = 2;
    while (i < n) {
        s = s + a*b;
        i = i + 1;
    }
    return s;
}
```

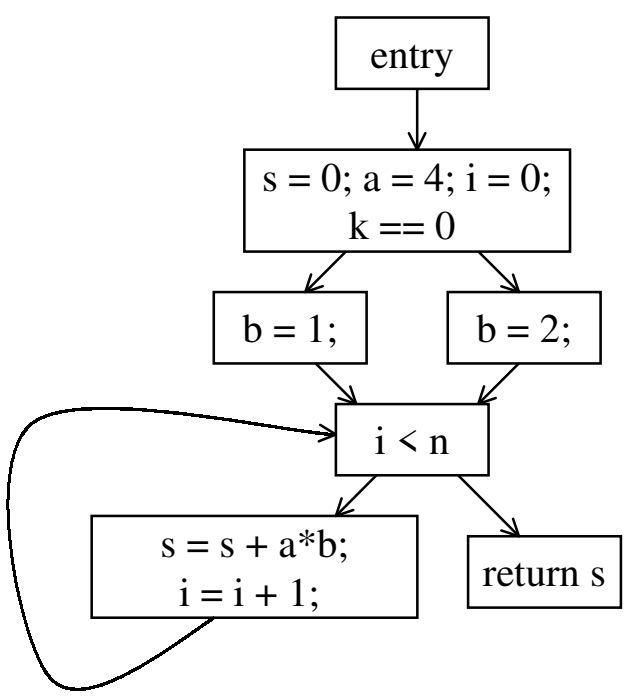

Control Flow Graph

- Nodes Represent Computation
  - Each Node is a Basic Block
  - Basic Block is a Sequence of Instructions with
    - No Branches Out Of Middle of Basic Block
    - No Branches Into Middle of Basic Block
    - Basic Blocks should be maximal
  - Execution of basic block starts with first instruction
  - Includes all instructions in basic block
- Edges Represent Control Flow

Two Kinds of Variables

- Temporaries Introduced By Compiler
  - Transfer values only within basic block
  - Introduced as part of instruction flattening
  - Introduced by optimizations/transformations
- Program Variables
  - Declared in original program
  - May transfer values between basic blocks

Basic Block Optimizations

- Common Sub-Expression Elimination
  - a = (x+y)+z; b = x+y;
  - t = x+y; a = t+z; b = t;
- Constant Propagation
  - x = 5; b = x+y;
  - b = 5+y;
- Algebraic Simplification
  - a = x * 1;
  - a = x;
- Copy Propagation
  - a = x+y; b = a; c = b+z;
  - a = x+y; b = a; c = a+z;
- Dead Code Elimination
  - a = x+y; b = a; c = a+z;
  - a = x+y; c = a+z
- Strength Reduction
  - t = i * 4;
  - t = i << 2;

Value Numbering

- Normalize basic block so that all statements are of the form
  - var = var op var (where op is a binary operator)
  - var = op var (where op is a unary operator)
  - var = var
- Simulate execution of basic block
  - Assign a virtual value to each variable
  - Assign a virtual value to each expression
  - Assign a temporary variable to hold value of each computed expression

Value Numbering for CSE

- As simulate execution of program
- Generate a new version of program
  - Each new value assigned to temporary
    - a = x+y; becomes a = x+y; t = a;
  - Temporary preserves value for use later in program even if original variable rewritten
    - a = x+y; a = a+z; b = x+y becomes
    - a = x+y; t = a; a = a+z; b = t;

CSE Example

- Original
  - a = x+y
  - b = a+z
  - b = b+y
  - c = a+z
- After CSE
  - a = x+y
  - b = a+z
  - t = b
  - b = b+y
  - c = t
- Issues
  - Temporaries store values for use later
  - CSE with different names
    - a = x; b = x+y; c = a+y;
  - Excessive Temp Generation and Use

Original Basic Block

a = x+y
b = a+z
b = b+y
c = a+z

New Basic Block

a = x+y
t1 = a
b = a+z
t2 = b
b = b+y
t3 = b
c = t2

Var to Val

x→v1
y → v2
a → v3
z → v4
b → v6
c → v5

Exp to Val

v1+v2 → v3
v3+v4 → v5
v5+v2 → v6

Exp to Tmp

v1+v2 → t1
v3+v4 → t2
v5+v2 → t3

Problems

- Algorithm has a temporary for each new value
  - a = x+y; t1 = a
- Introduces
  - lots of temporaries
  - lots of copy statements to temporaries
- In many cases, temporaries and copy statements are unnecessary
- So we eliminate them with copy propagation and dead code elimination

Copy Propagation

- Once again, simulate execution of program
- If possible, use the original variable instead of a temporary
  - a = x+y; b = x+y;
  - After CSE becomes a = x+y; t = a; b = t;
  - After CP becomes a = x+y; b = a;
- Key idea: determine when original variables are NOT overwritten between computation of stored value and use of stored value

Copy Propagation Maps

- Maintain two maps
  - tmp to var: tells which variable to use instead of a given temporary variable
  - var to set: inverse of tmp to var. tells which temps are mapped to a given variable by tmp to var

Copy Propagation Example

- Original
  - a = x+y
  - b = a+z
  - c = x+y
  - a = b
- After CSE
  - a = x+y
  - t1 = a
  - b = a+z
  - t2 = b
  - c = t1
  - a = b
- After CSE and Copy Propagation
  - a = x+y
  - t1 = a
  - b = a+z
  - t2 = b
  - c = a
  - a = b

Copy Propagation Example

Basic Block After CSE

a = x+y
t1 = a

Basic Block After CSE and Copy Prop

a = x+y
t1 = a

tmp to var

t1 → a

var to set

a →{t1}

Copy Propagation Example

Basic Block After CSE

a = x+y
t1 = a
b = a+z
t2 = b

Basic Block After CSE and Copy Prop

a = x+y
t1 = a
b = a+z
t2 = b

tmp to var

t1 → a
t2 → b

var to set

a →{t1}
b →{t2}

Copy Propagation Example

Basic Block After CSE

a = x+y
t1 = a
b = a+z
t2 = b
c = t1

Basic Block After CSE and Copy Prop

a = x+y
t1 = a
b = a+z
t2 = b

tmp to var

t1 → a
t2 → b

var to set

a → {t1}
b →{t2}

Copy Propagation Example

Basic Block After CSE

a = x+y
t1 = a
b = a+z
t2 = b
c = t1

Basic Block After CSE and Copy Prop

a = x+y
t1 = a
b = a+z
t2 = b
c = a

tmp to var

t1 → a
t2 → b

var to set

a →{t1}
b →{t2}

Copy Propagation Example

Basic Block After CSE	Basic Block After CSE and Copy Prop
a = x+y	a = x+y
t1 = a	t1 = a
b = a+z	b = a+z
t2 = b	t2 = b
c = t1	c = a
a = b	a = b

tmp to var	var to set
t1 → a	a →{t1}
t2 → b	b →{t2}

Copy Propagation Example

Basic Block After CSE	Basic Block After CSE and Copy Prop
a = x+y	a = x+y
t1 = a	t1 = a
b = a+z	b = a+z
t2 = b	t2 = b
c = t1	c = a
a = b	a = b

tmp to var	var to set
t1 → t1	a →{}
t2 → b	b →{t2}

Dead Code Elimination

- Copy propagation keeps all temps around
- There may be temps that are never read
- Dead Code Elimination removes them

Basic Block After CSE and Copy Prop	Basic Block After CSE and Copy Prop
a = x+y	a = x+y
t1 = a	b = a+z
b = a+z	c = a
t2 = b	a = b
c = a	
a = b	

Dead Code Elimination

- Basic Idea
  - Process Code In Reverse Execution Order
  - Maintain a set of variables that are needed later in computation
  - On encountering an assignment to a temporary that is not needed, we remove the assignment

Basic Block After CSE and Copy Prop

a = x+y
t1 = a
b = a+z
t2 = b
c = a
⇨ a = b

Needed Set
{b}

Basic Block After CSE and Copy Prop

a = x+y
t1 = a
b = a+z
t2 = b
⇨ c = a
a = b

Needed Set
{a, b}

Basic Block After CSE and Copy Prop

a = x+y
t1 = a
b = a+z
⟹ t2 = b
c = a
a = b

Needed Set
{a, b}

Basic Block After CSE and Copy Prop

a = x+y
t1 = a
b = a+z
⟹
c = a
a = b

Needed Set
{a, b}

Basic Block After CSE and Copy Prop

a = x+y
t1 = a
⟹ b = a+z

c = a
a = b

Needed Set
{a, b, z}

Basic Block After CSE and Copy Prop

a = x+y
⟹ t1 = a
b = a+z

c = a
a = b

Needed Set
{a, b, z}

Basic Block After CSE and Copy Prop

a = x+y
⟹
b = a+z

c = a
a = b

Needed Set
{a, b, z}

Basic Block After CSE Copy Propagation and Dead Code Elimination

⟹ a = x+y

b = a+z

c = a
a = b

Needed Set
{a, b, z}

Basic Block After CSE Copy Propagation
and Dead Code Elimination

a = x+y

b = a+z

c = a
a = b

Needed Set
{a, b, z}

Interesting Properties

- Analysis and Optimization Algorithms Simulate Execution of Program
  - CSE and Copy Propagation go forward
  - Dead Code Elimination goes backwards
- Optimizations are stacked
  - Group of basic transformations
  - Work together to get good result
  - Often, one transformation creates inefficient code that is cleaned up by following transformations

Other Basic Block Transformations

- Constant Propagation
- Strength Reduction
  - a << 2 = a * 4; a + a + a = 3 * a;
- Algebraic Simplification
  - a = a * 1; b = b + 0;
- Unified transformation framework

Dataflow Analysis

- Used to determine properties of program that involve multiple basic blocks
- Typically used to enable transformations
  - common sub-expression elimination
  - constant and copy propagation
  - dead code elimination
- Analysis and transformation often come in pairs

Reaching Definitions

- Concept of definition and use
  - a = x+y
  - is a definition of a
  - is a use of x and y
- A definition reaches a use if
  - value written by definition
  - may be read by use

Reaching Definitions

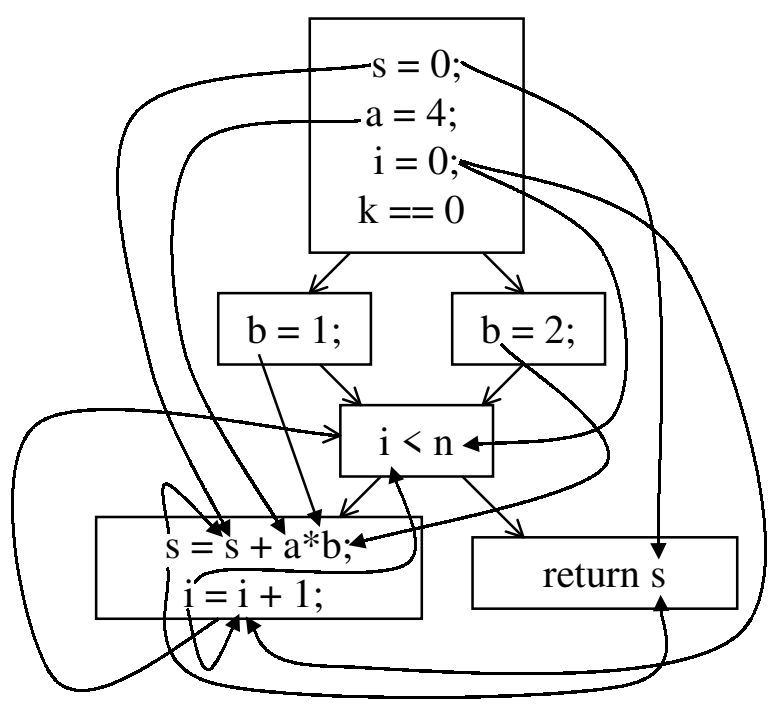

Reaching Definitions and Constant Propagation

- Is a use of a variable a constant?
  - Check all reaching definitions
  - If all assign variable to same constant
  - Then use is in fact a constant
- Can replace variable with constant

Is a Constant in s = s+a*b?

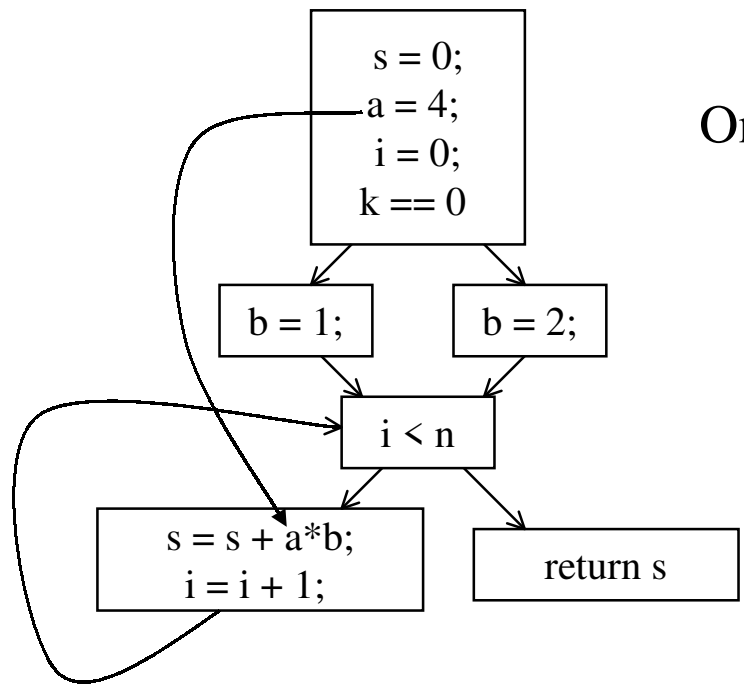

Yes!

On all reaching definitions a = 4

Constant Propagation Transform

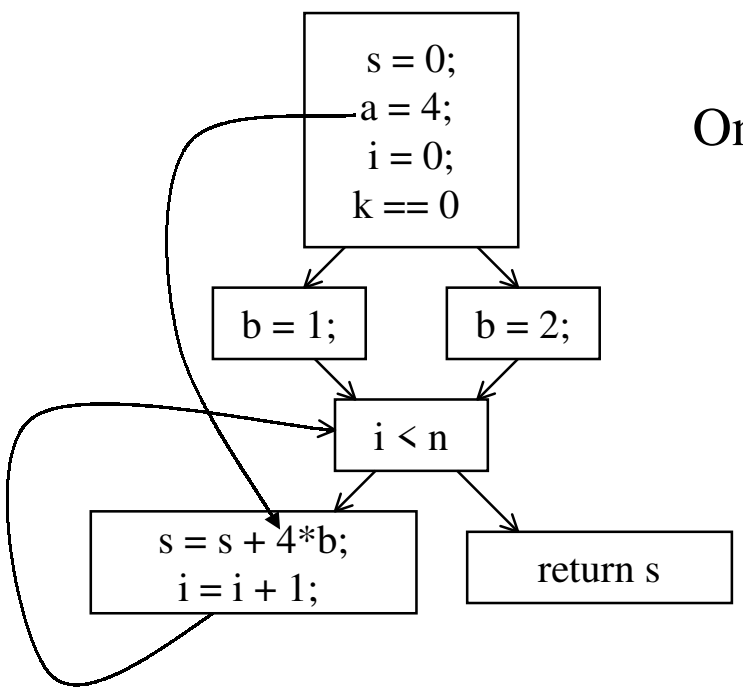

Yes!

On all reaching definitions a = 4

Is b Constant in s = s+a*b?

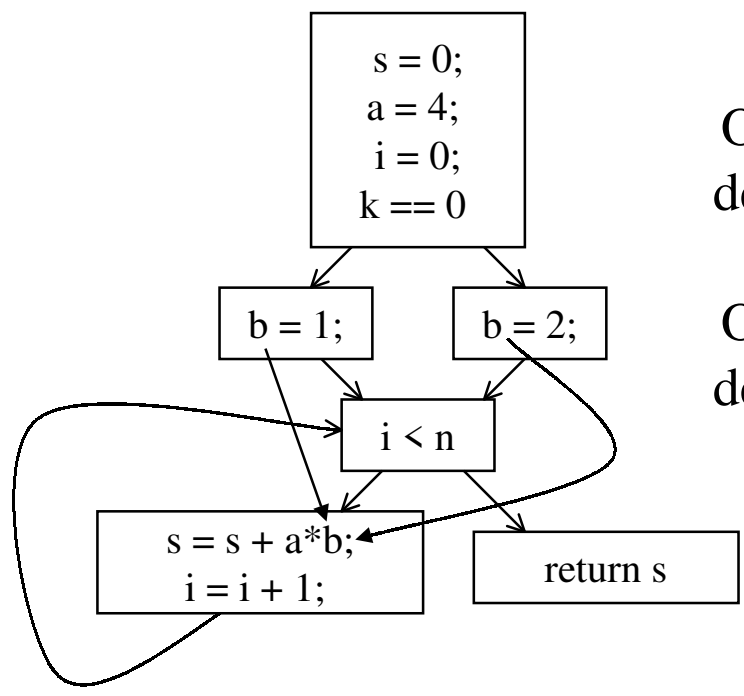

No!

One reaching definition with b = 1

One reaching definition with b = 2

Computing Reaching Definitions

- Compute with sets of definitions
  - represent sets using bit vectors
  - each definition has a position in bit vector
- At each basic block, compute
  - definitions that reach start of block
  - definitions that reach end of block
- Do computation by simulating execution of program until the fixed point is reached

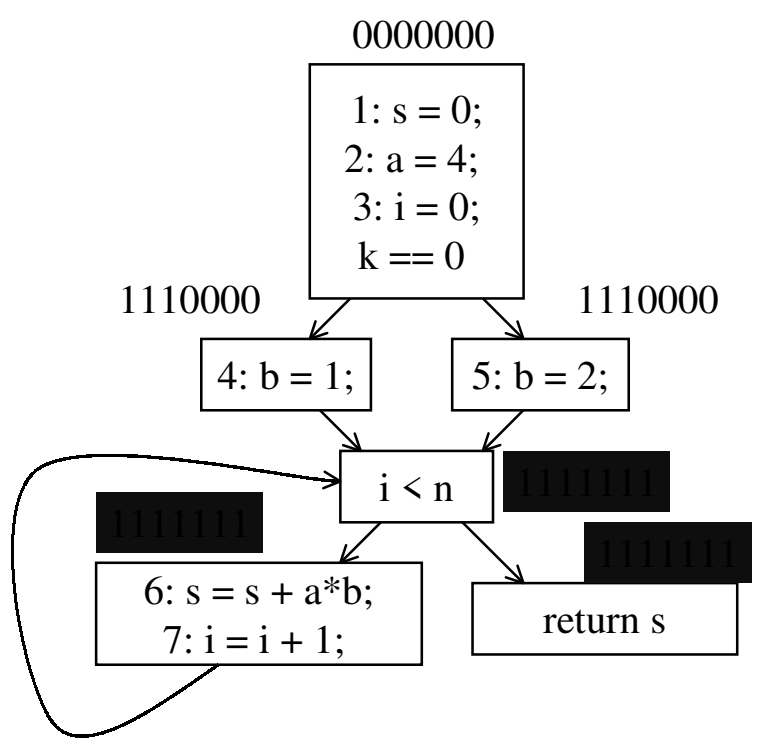

Formalizing Analysis

- Each basic block has
  - IN - set of definitions that reach beginning of block
  - OUT - set of definitions that reach end of block
  - GEN - set of definitions generated in block
  - KILL - set of definitions killed in in block
- GEN[s = s + a*b; i = i + 1;] = 0000011
- KILL[s = s + a*b; i = i + 1;] = 1010000
- Compiler scans each basic block to derive GEN and KILL sets

Dataflow Equations

- IN[b] = OUT[b1] ∪ ... ∪ OUT[bn]
  - where b1, ..., bn are predecessors of b in CFG
- OUT[b] = (IN[b] - KILL[b]) ∪ GEN[b]
- IN[entry] = 0000000
- Result: system of equations

Solving Equations

- Use fixed point algorithm
- Initialize with solution of OUT[b] = 0000000
- Repeatedly apply equations
  - IN[b] = OUT[b1] ∪ ... ∪ OUT[bn]
  - OUT[b] = (IN[b] - KILL[b]) ∪ GEN[b]
- Until reach fixed point
- Until equation application has no further effect
- Use a worklist to track which equation applications may have a further effect

Reaching Definitions Algorithm

```
for all nodes n in N OUT[n] = emptyset; // OUT[n] = GEN[n];
Changed = D; // D = all definitions in graph
while (Changed != emptyset)
  choose a node n in Changed;
  Changed = Changed - { n };
  IN[n] = emptyset;
  for all nodes p in predecessors(n) IN[n] = IN[n] ∪ OUT[p];
  OUT[n] = GEN[n] ∪ (IN[n] - KILL[n]);
  if (OUT[n] changed)
    for all nodes s in successors(n) Changed = Changed ∪ { s };
```


Questions

- Does the algorithm halt?
  - yes, because transfer function is monotonic
  - if increase IN, increase OUT
  - in limit, all bits are 1
- If bit is 1, is there always an execution in which corresponding definition reaches basic block?
- If bit is 0, does the corresponding definition ever reach basic block?
- Concept of conservative analysis

Available Expressions

- An expression x+y is available at a point p if
  - every path from the initial node to p evaluates x+y before reaching p,
  - and there are no assignments to x or y after the evaluation but before p.
- Available Expression information can be used to do global (across basic blocks) CSE
- If expression is available at use, no need to reevaluate it

Computing Available Expressions

- Represent sets of expressions using bit vectors
- Each expression corresponds to a bit
- Run dataflow algorithm similar to reaching definitions
- Big difference
  - definition reaches a basic block if it comes from ANY predecessor in CFG
  - expression is available at a basic block only if it is available from ALL predecessors in CFG

Expressions
1: x+y
2: i<n
3: i+c
4: x==0

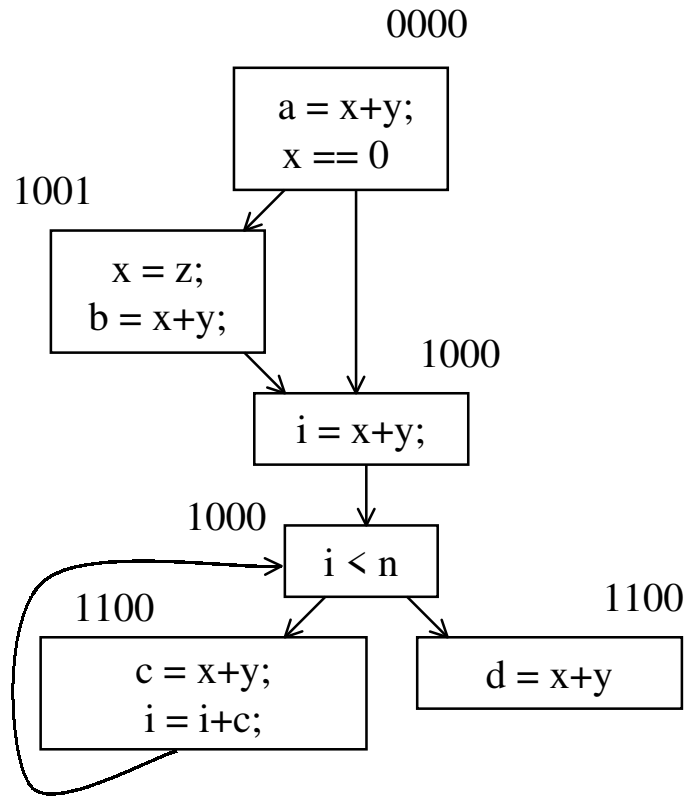

Global CSE Transform

Expressions
1: x+y
2: i<n
3: i+c
4: x==0

must use same temp for CSE in all blocks

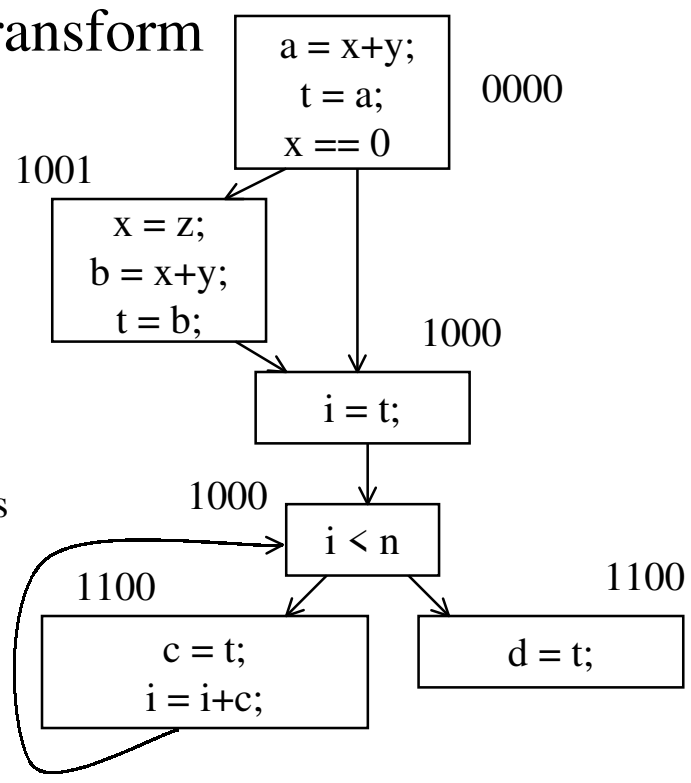

Formalizing Analysis

- Each basic block has
  - IN - set of expressions available at start of block
  - OUT - set of expressions available at end of block
  - GEN - set of expressions computed in block
  - KILL - set of expressions killed in in block
- GEN[x = z; b = x+y] = 1000
- KILL[x = z; b = x+y] = 1001
- Compiler scans each basic block to derive GEN and KILL sets

Dataflow Equations

- IN[b] = OUT[b1] $\cap$ ... $\cap$ OUT[bn]
  - where b1, ..., bn are predecessors of b in CFG
- OUT[b] = (IN[b] - KILL[b]) $\cup$ GEN[b]
- IN[entry] = 0000
- Result: system of equations

Solving Equations

- Use fixed point algorithm
- IN[entry] = 0000
- Initialize OUT[b] = 1111
- Repeatedly apply equations
  - IN[b] = OUT[b1] $\cap$ ... $\cap$ OUT[bn]
  - OUT[b] = (IN[b] - KILL[b]) $\cup$ GEN[b]
- Use a worklist algorithm to reach fixed point

Available Expressions Algorithm

```
for all nodes n in N OUT[n] = E;  // OUT[n] = E - KILL[n];
 IN[Entry] = emptyset; OUT[Entry] = GEN[Entry];
Changed = N - { Entry }; // N = all nodes in graph
 while (Changed != emptyset)
   choose a node n in Changed;
   Changed = Changed - { n };
   IN[n] = E; // E is set of all expressions
   for all nodes p in predecessors(n)
         IN[n] = IN[n] ∩ OUT[p];
   OUT[n] = GEN[n] ∪ (IN[n] - KILL[n]);
   if (OUT[n] changed)
     for all nodes s in successors(n) Changed = Changed ∪ { s };
```


Questions

- Does algorithm always halt?
- If expression is available in some execution, is it always marked as available in analysis?
- If expression is not available in some execution, can it be marked as available in analysis?
- In what sense is the algorithm conservative?

Duality In Two Algorithms

- Reaching definitions
  - Confluence operation is set union
  - OUT[b] initialized to empty set
- Available expressions
  - Confluence operation is set intersection
  - OUT[b] initialized to set of available expressions
- General framework for dataflow algorithms.
- Build parameterized dataflow analyzer once, use for all dataflow problems

Liveness Analysis

- A variable v is live at point p if
  - v is used along some path starting at p, and
  - no definition of v along the path before the use.
- When is a variable v dead at point p?
  - No use of v on any path from p to exit node, or
  - If all paths from p redefine v before using v.

What Use is Liveness Information?

- Register allocation.
  - If a variable is dead, can reassign its register
- Dead code elimination.
  - Eliminate assignments to variables not read later.
  - But must not eliminate last assignment to variable (such as instance variable) visible outside CFG.
  - Can eliminate other dead assignments.
  - Handle by making all externally visible variables live on exit from CFG

Conceptual Idea of Analysis

- Simulate execution
- But start from exit and go backwards in CFG
- Compute liveness information from end to beginning of basic blocks

Liveness Example

- Assume a,b,c visible outside method
- So are live on exit
- Assume x,y,z,t not visible
- Represent Liveness Using Bit Vector
  - order is abcxyzt



Dead Code Elimination

- Assume a,b,c visible outside method
- So are live on exit
- Assume x,y,z,t not visible
- Represent Liveness Using Bit Vector
  - order is abcxyzt



Formalizing Analysis

- Each basic block has
  - IN - set of variables live at start of block
  - OUT - set of variables live at end of block
  - USE - set of variables with upwards exposed uses in block
  - DEF - set of variables defined in block
- USE[x = z; x = x+1;] = { z } (x not in USE)
- DEF[x = z; x = x+1;y = 1;] = {x, y}
- Compiler scans each basic block to derive GEN and KILL sets

Algorithm

```
out[Exit] = emptyset; in[Exit] = use[n];
for all nodes n in N - { Exit } in[n] = emptyset;
Changed = N - { Exit };
while (Changed != emptyset)
   choose a node n in Changed;
   Changed = Changed - { n };
   out[n] = emptyset;
   for all nodes s in successors(n) out[n] = out[n] ∪ in[p];
   in[n] = use[n] ∪ (out[n] - def[n]);
   if (in[n] changed)
     for all nodes p in predecessors(n)
       Changed = Changed ∪{ p };
```


Similar to Other Dataflow Algorithms

- Backwards analysis, not forwards
- Still have transfer functions
- Still have confluence operators
- Can generalize framework to work for both forwards and backwards analyses

Analysis Information Inside Basic Blocks

- One detail:
  - Given dataflow information at IN and OUT of node
  - Also need to compute information at each statement of basic block
  - Simple propagation algorithm usually works fine
  - Can be viewed as restricted case of dataflow analysis

Summary

- Basic Blocks and Basic Block Optimizations
  - Copy and constant propagation
  - Common sub-expression elimination
  - Dead code elimination
- Dataflow Analysis
  - Control flow graph
  - IN[b], OUT[b], transfer functions, join points
- Paired of analyses and transformations
  - Reaching definitions/constant propagation
  - Available expressions/common sub-expression elimination
  - Liveness analysis/Dead code elimination